



VINYL

by lalegno 

WOOD
— REDEFINED





— FLOORS
WITH
STYLE

COLLECTION

ALL ABOUT

— Rigid

Lalegno Rigid Vinyl Plank consists of two distinct ranges:

- **RVP (RIGID VINYL PLANK)**

A range of wood-finish planks in 1220mm lengths.

- **RVH (RIGID VINYL HERRINGBONE)**

A range of wood-finish herringbone planks in 600mm lengths.

- **EXTRA MATT TOPCOAT**

Transparent matt finish with anti-scratch Aluminium Oxide coating for highly durable surface protection that is easy to maintain.

- **0.7mm WEAR LAYER**

The commercially rated 0.7mm wear layer is exceptionally durable and preserves the authentic EIR finish, protecting from scuffs and stains.

- **TRU GRAIN MATCHES THE WOOD**


EIR finish produces a textured surface which exactly matches the grain of the wood or stone image below for a highly authentic and natural appearance.

- **Latest SPC (Stone Power Composite) technology**

Ultra strong Rigid core. The SPC core is made by combining limestone powder and stabilisers to create a dimensionally stable and waterproof core. Contains no heavy metals or formaldehyde nor any other harmful substances and is 100% environmentally responsible flooring.

- **BUILT-IN UNDERLAY**

1mm thick integrated IXPE underlay with 19dB impact sound absorption which also gives it an excellent feeling underfoot.

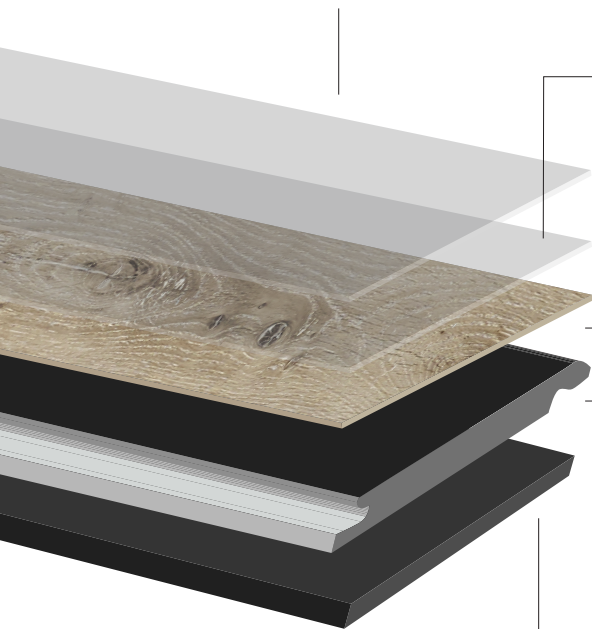

01.

10
ADVANTAGES

7

02.

RIGID
–FLOORS

21

03.




LUXURY VINYL
–FLOORS

29

04.

TECHNICAL
–INFO

35



RIGID FLOORS — 12 ADVANTAGES



1. DURABLE 0.7 MM WEAR LAYER

Built to withstand daily life. The 0.7 mm wear layer provides exceptional protection against scratches, scuffs, dents, and general wear and tear. Ideal for high-traffic areas, busy homes, or commercial spaces, it keeps your floors looking fresh and vibrant for years. Enjoy a combination of style, strength, and resilience that lasts.



2. UNDERFLOOR HEATING

Our vinyl flooring is fully compatible with underfloor heating, efficiently conducting warmth while maintaining stability and performance. Enjoy energy-efficient comfort without compromising on appearance or longevity—perfect for modern homes, offices, or any space where cozy, even heat is desired.



GUBBIO

3. TRU GRAIN TECHNOLOGY

Bring the natural beauty of wood into your home with our Tru Grain embossed-in-register technology, aligns surface texture with realistic wood patterns underneath, creating depth, character, and authentic tactile appeal. Each plank captures subtle knots, grains, and natural variations, giving you the elegance of real hardwood with the durability, comfort, and easy maintenance of vinyl.




TRU GRAIN EMBOSSED

BARBARESCO




TRU GRAIN EMBOSSED

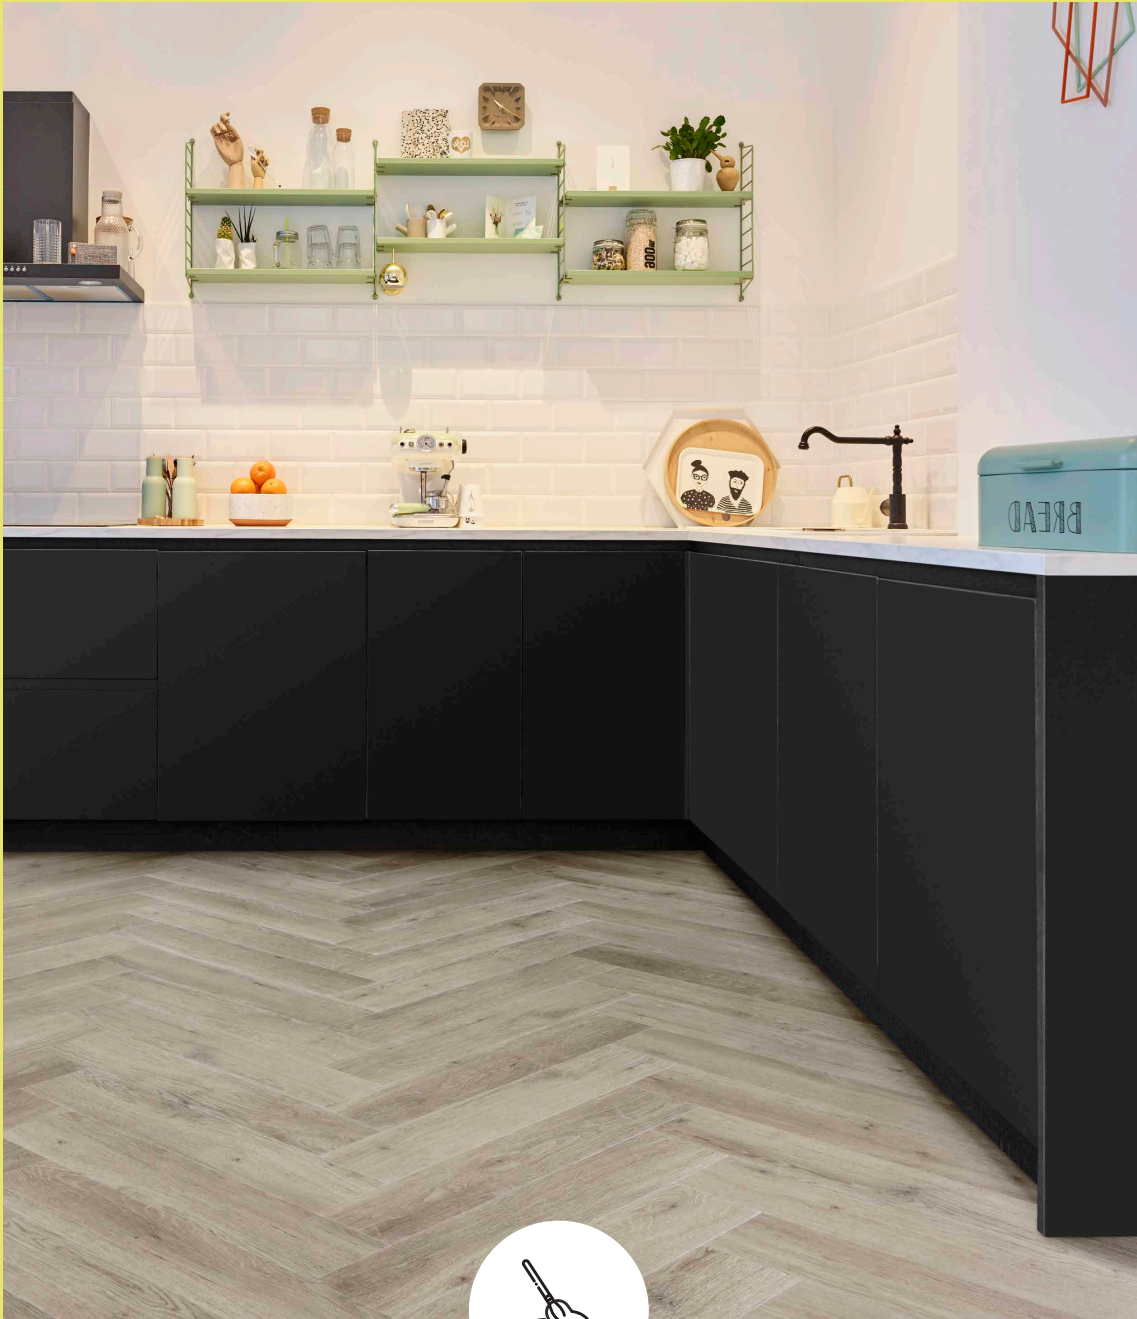

LIMONCELLO - HERRINGBONE

4. EASY TO MAINTAIN

Spend less time cleaning and more time enjoying your home. Our non-porous vinyl resists stains, scuffs, and dirt, making routine cleaning as simple as a quick sweep or light mop. No sealing, treatments, or special products are needed. Perfect for busy households and high-traffic areas, it delivers enduring style with minimal effort.

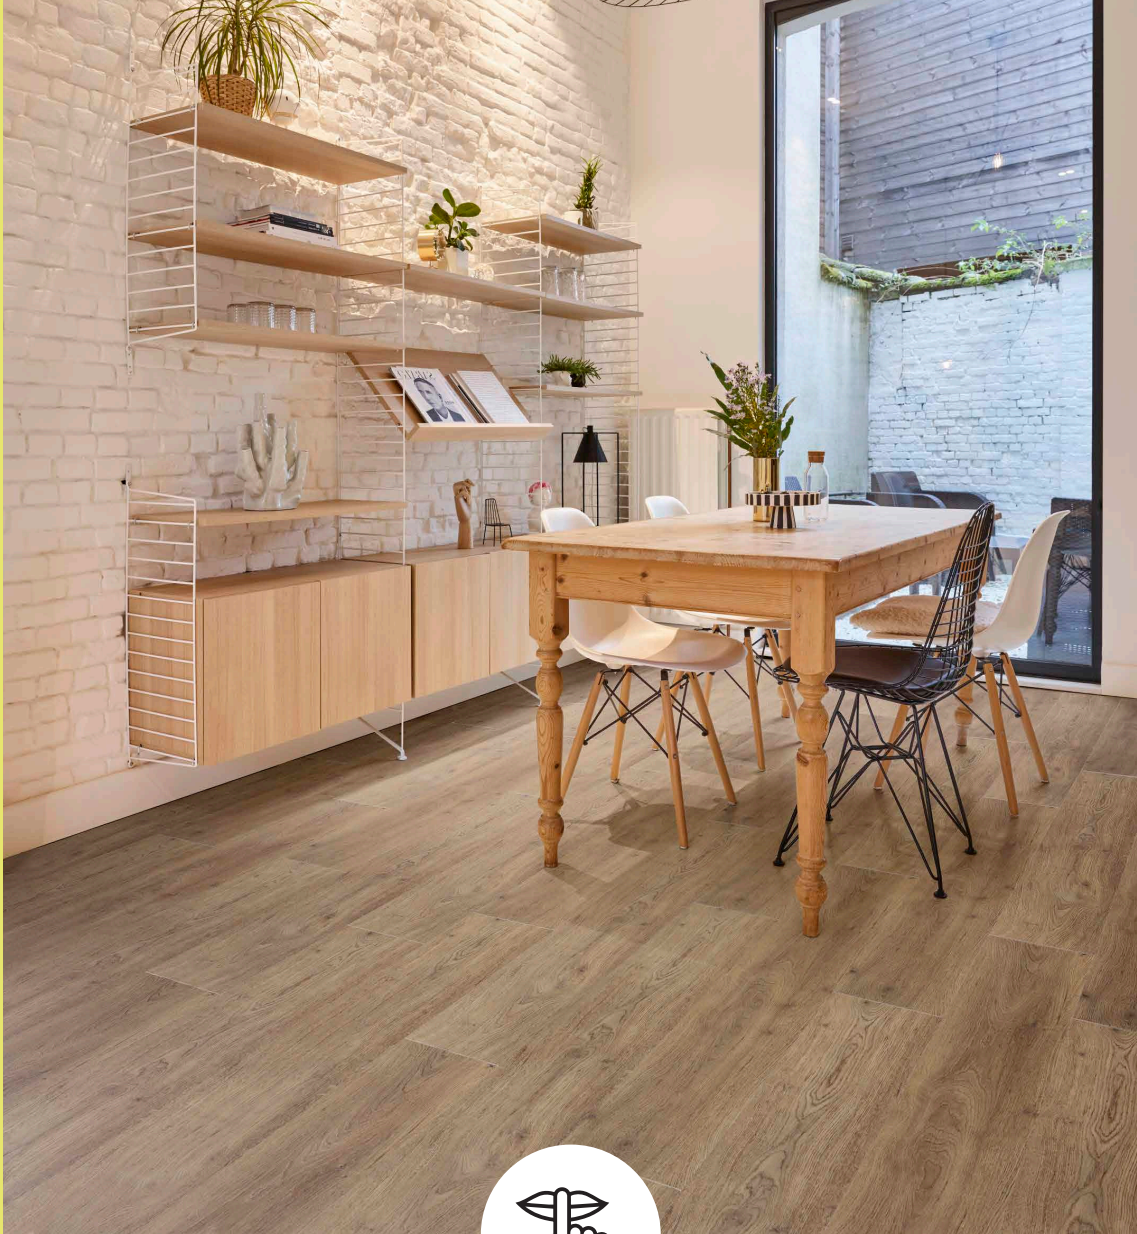

MONTALCINO



5. ACOUSTIC COMFORT

Step into a quieter home. Our rigid vinyl flooring includes a built-in sound-reducing underlay that absorbs impact noise and reduces sound by up to 19dB. Footsteps, everyday movement, and other household sounds are softened, creating a peaceful, comfortable environment—ideal for multi-level homes, apartments, and commercial spaces.




6. SLIP-RESISTANT

Safety and style go hand in hand. Our vinyl floors feature a 36+ PTV anti-slip rating, providing secure footing in wet or high-traffic areas like kitchens, bathrooms, and hallways. The textured surface enhances grip while complementing the realistic wood finish. Durable and reliable, it helps prevent slips and falls without compromising your floor's appearance.




GUBBIO




7. EASY INSTALLATION

Enjoy stress-free installation. Our innovative 5G click system locks planks together seamlessly, allowing for a fast, glue-free installation. The result is a smooth, stable surface that looks professional from day one. Whether you're a skilled DIYer or prefer professional help, our system ensures a flawless, long-lasting finish with minimal effort.

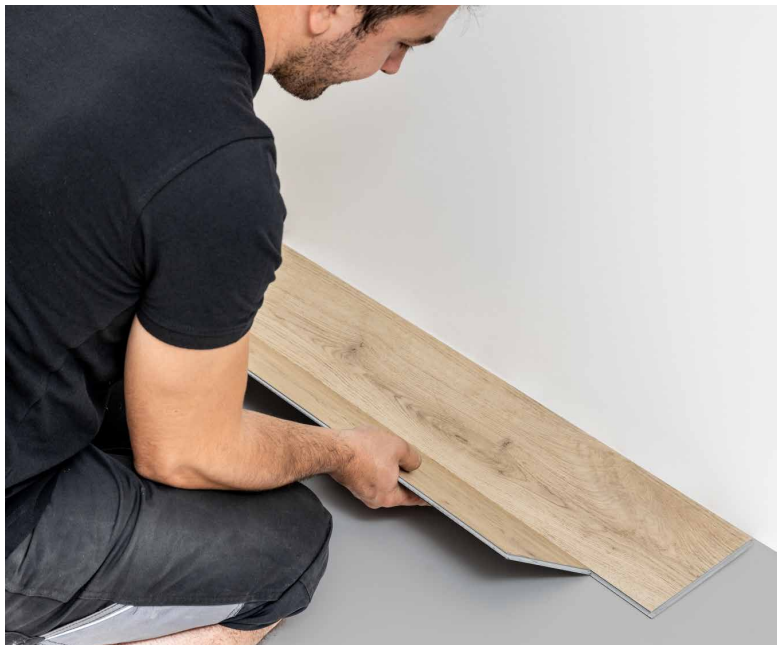

RIGID FLOORS - WITH CLICK SYSTEM



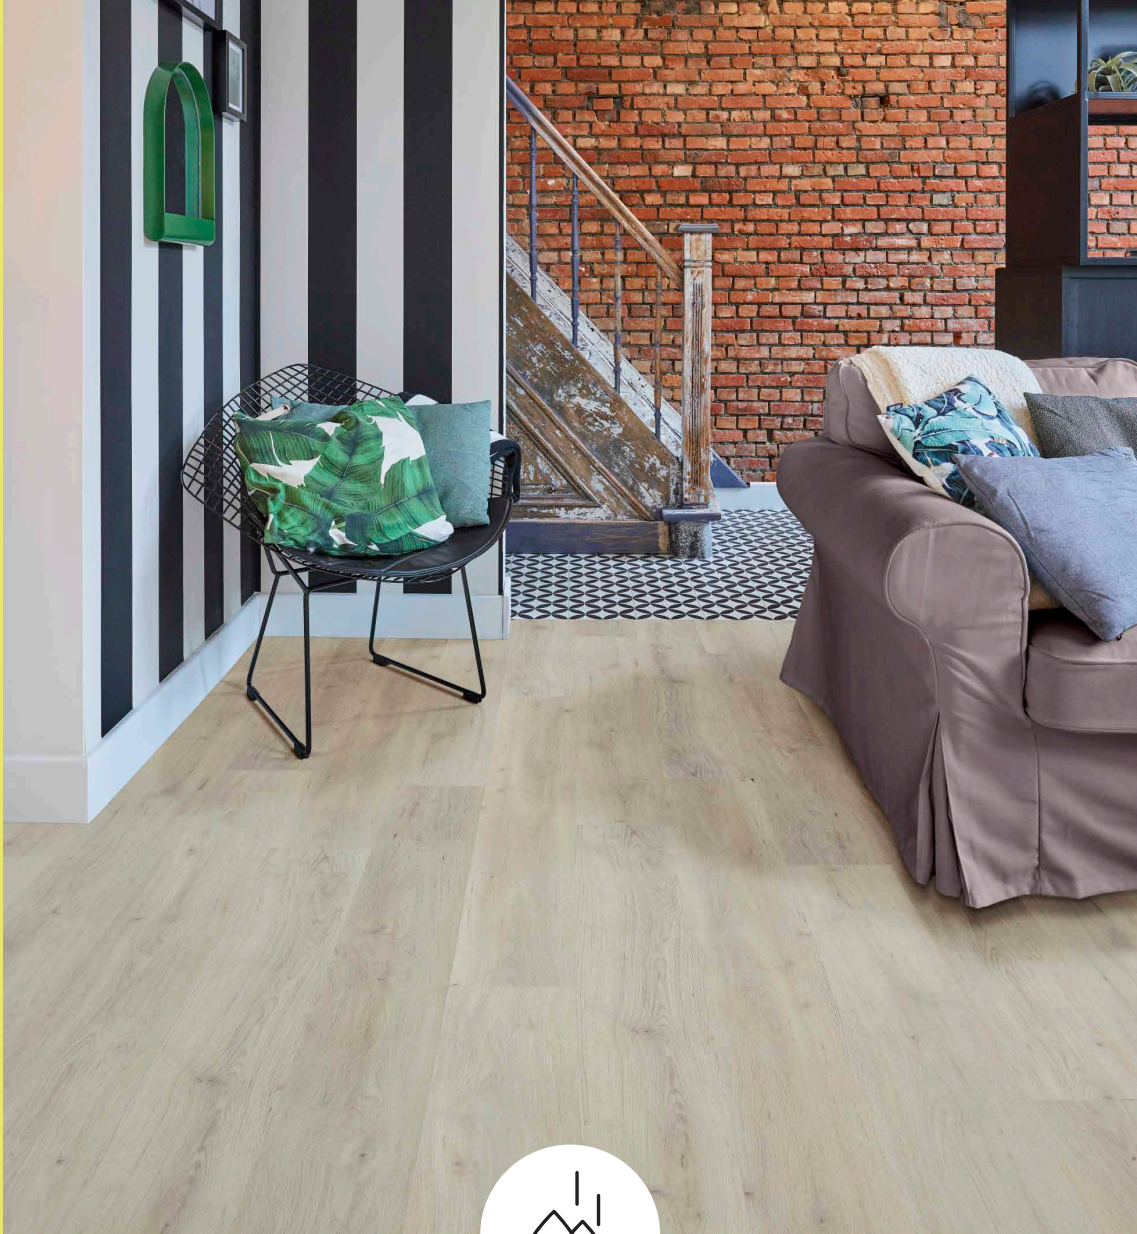

BAROLO




8. WATER RESISTANT

Say goodbye to water damage! Our vinyl flooring is water resistant, making it perfect for kitchens, bathrooms and living rooms. Its non-porous surface prevents spills, splashes, and everyday accidents from seeping through, protecting your floor and home. Enjoy long-lasting beauty and strength even in the busiest or most moisture-prone spaces, without the worry of warping or swelling.



VENETO



9. UV RESISTANT

Keep your floors looking like new. Our UV-resistant vinyl protects against fading or discoloration caused by sunlight, preserving vibrant colours and natural beauty. Even in rooms with large windows or direct sunlight, your floors remain fresh, bright, and inviting year after year.



10. LOW VOC

Your health matters. Our vinyl flooring carries an A+ VOC rating, meaning it releases minimal chemical emissions. This ensures excellent indoor air quality, creating a cleaner, safer environment for your family, employees, or customers. Combine peace of mind with a stylish, high-performance floor that supports a healthier lifestyle.



AREZZO




GUBBIO



11. PET FRIENDLY

Designed for everyday life with pets, our vinyl has a solid 0.7 mm wear layer and a tough, scratch and stain resistant surface that stands up to claws, spills, and heavy use. It's non-porous, so spills and messes can be cleaned hassle-free, and the slip-resistant texture helps prevent any slips.



12. LIMITED REPEATS

Each board is made using a carefully chosen mix of wood patterns, with the repetition kept nicely under control. This means the finished floor doesn't end up looking uniform or obviously repetitive. By limiting how often the same design shows up, the whole installation feels more random and natural – much closer to the natural variation you'd see in real timber. It works well in both small rooms and larger spaces.



LIMONCELLO

Rigid VINYL — PLANKS

6,50 MM PLANKS

Rigid VINYL — PLANKS

6,50 MM - AVAILABLE IN 12 COLOURS

LIMONCELLO




Total thickness of 6.50 mm - Wear layer of 0.70 mm and integrated backing.
Dimensions: 180 x 1220 mm.

MONTALCINO



LOIRE

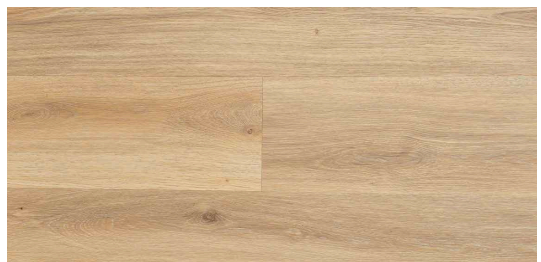

AREZZO



NEBBIOLO



GUBBIO



JESI





PROVENCE

MONTALCINO



VENETO



PALERMO



BARBARESCO



BAROLO





VENETO



BAROLO



AREZZO



JESI




BARBARESCO

Rigid VINYL — HERRINGBONE

6,50 MM - AVAILABLE IN 3 COLOURS

AREZZO - HERRINGBONE

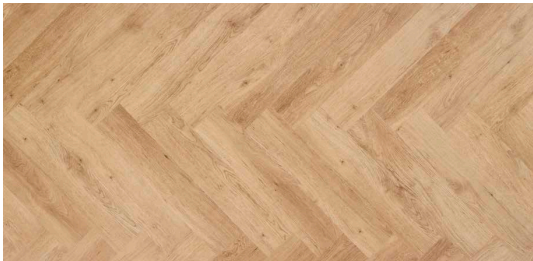

Total thickness of 6.50 mm - Wear layer of 0.70 mm and integrated backing.
Dimensions: 120 x 600 mm.

MONTALCINO - HERRINGBONE



LIMONCELLO - HERRINGBONE





AREZZO - HERRINGBONE

STICK-DOWN — LVT

2,50 MM PLANKS

LUXURY VINYL — FLOORS

2,50 MM - AVAILABLE IN 10 COLOURS

LIMONCELLO - STICK-DOWN



Total thickness of 2.50 mm. Wear layer of 0.70 mm dry back.
Dimensions: 184 x 1219 mm.

MONTALCINO - STICK-DOWN



AREZZO - STICK-DOWN




PROVENCE - STICK-DOWN



GUBBIO - STICK-DOWN



LOIRE - STICK-DOWN

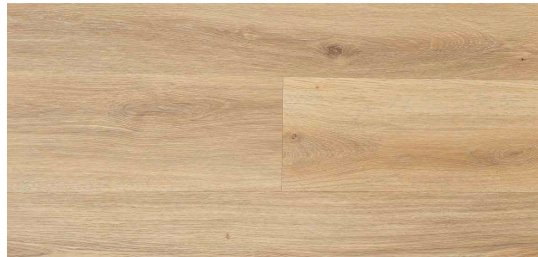



PALERMO - STICK-DOWN

VENETO - STICK-DOWN



PALERMO - STICK-DOWN



BARBARESCO - STICK-DOWN



BAROLO - STICK-DOWN



LUXURY VINYL — FLOORS

2,50 MM - AVAILABLE IN 9 COLOURS

AREZZO - HERRINGBONE




Total thickness of 2.50 mm - Wear layer of 0.70 mm.
Dimensions: 100 x 400 mm.

MONTALCINO - HERRINGBONE




BAROLO - HERRINGBONE

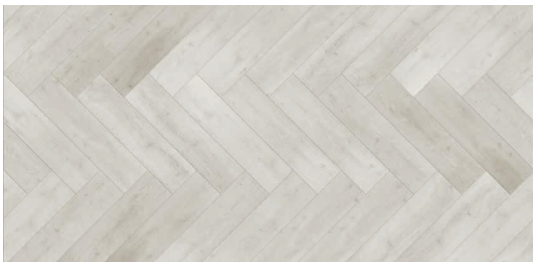

LIMONCELLO - HERRINGBONE



PROVENCE - HERRINGBONE

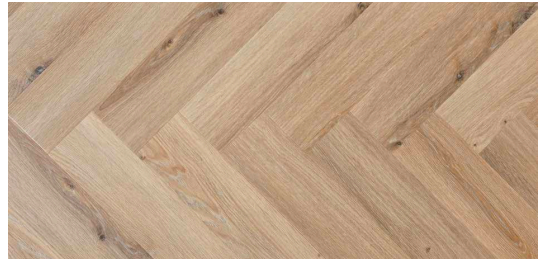




AREZZO - HERRINGBONE


PALERMO - HERRINGBONE



GUBBIO - HERRINGBONE

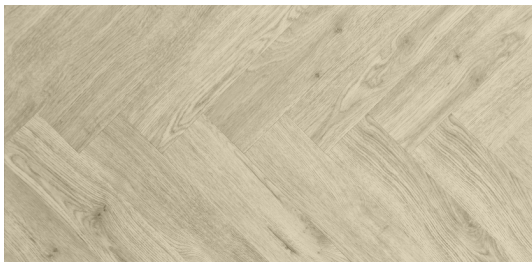

LOIRE - HERRINGBONE

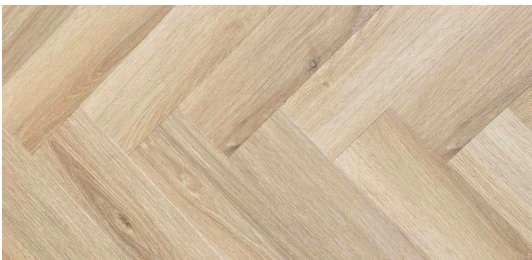

BARBARESCO - HERRINGBONE



Technical — INFORMATION

TECHNICAL DATA SHEET

TEST	STANDARD	RESULT			
BASIC DATA					
Dimensions	EN ISO 24342	LVT PLANK	LVT HERRINGBONE	RVP	RVH
		184 x 1219mm	100 x 400mm	180 x 1220mm	120 x 600mm
Pack Size	EN ISO 24342	3.59m ²	2.88m ²	2.2m ²	1.15m ²
Thickness	EN ISO 24347	2.5mm	2.5mm	6.5mm	6.5mm
Wear Layer	EN ISO 24340	0.70mm	0.70mm	0.70mm	0.70mm
Installation		Glue down	Glue down	5G Click	Click
Embossing		EIR	Standard	EIR	Standard
Surface Treatment		ALL RANGES: PU coating + protected with Aluminium Oxide (anti-scratch) and stain-resistant technology			
Core		n/a	n/a	Water-resistant rigid SPC core	
TECHNICAL DATA					
Bevelled Edge		4 x micro-bevels per plank		4 per plank	
Mass	ISO 23997	4.5 kg/m ²		10.80 kg/m ²	
Standards	EN 649/EN ISO 10582	n/a		Pass	
Classification	EN 685/EN ISO 10874 EN 685/EN ISO 10874 EN 685/EN ISO 10874	42: Light Industrial General 33: Commercial Heavy 23: Domestic Heavy		42: Light Industrial General 33: Commercial Heavy 23: Domestic Heavy	
Reaction to Fire	EN 13501-1	B _{f1} -s1		B _{f1} -s1	
Staining Resistance	ISO 26987	Pass		EN 423 - Pass	
Light Fastness	EN ISO 105-B02	≤6		>6	
Dimensional Stability	EN 434 / EN ISO 23999	≤0.15		≤0.10	
Acoustic Impact - Noise Reduction	EN ISO 717-2 EN ISO 140-8	n/a		ΔL _w =19dB	
Curling Resultant to Heat	ISO 23999	≤1.5		n/a	
Indentation - Residual	EN 433 EN ISO 24343-1	≤0.10		≤0.10	
Castor Chair - Continuous Use	ISO 4918	Pass		EN 425 – Pass ISO 4918 – Pass	
Slip Resistance*	EN 16165	36 PTV		36 PTV	
Wear Resistance	EN 660-2	Class T		EN 13329 (Annex E) – AC5	
Impact Resistance	EN 13329	≥1800mm, IC5		≥1200mm	
Click Tension	Internal	n/a		200 N/5cm	
Swelling	ISO 24336	n/a		Pass	
Underfloor Heating (UFH)		Guaranteed for use with water-based UFH systems. Installation guidelines must be strictly followed.			
Installation notes - IMPORTANT		Must NOT be installed in conservatories or in direct sunlight. Contact us for further advice.			
DANGEROUS SUBSTANCES					
VOC Emission	French VOC Regulation (ISO 16000)	A+		A+	
E1 Formaldehyde - HCHO Emission	EN 717-1	Class E1, ND		Class E1	

*Slip-resistance is measured on ex-factory product on a level horizontal plane. Slip-resistance can be affected by surface contamination, use, and how the product is maintained.

LVT (Plank & Herringbone)



Rigid Vinyl Plank (RVP / RVH)



1. General

This warranty applies to all vinyl floors and walls distributed by Rigid Floors BV - Rigid Floors & Walls. Rigid Floors BV offers a 25-year warranty for residential use and a 10-year warranty for commercial use. The warranty period begins from the date of purchase, with the purchase invoice as proof.

The warranty for residential use operates on a pro-rata basis. For the first 10 years, there is a full warranty; after that, there is an annual reduction of 1/15th of the value per remaining year after the first 10 years.

The warranty for commercial use does not apply to:

- Institutional buildings (such as, but not limited to, hospitals and government buildings)
- Hospitality establishments (such as, but not limited to, restaurants, cafés, dance venues)
- Places with intensive commercial activity (airports, schools, salons)
- Other places with high traffic and immediate access to public roads

The warranty is non-transferable and therefore valid only for the first owner of the original installation. The owner is the person or entity mentioned on the purchase invoice referred to above. The warranty automatically lapses if a renovation or repair is carried out on the floor after installation.

2. Conditions

Upon delivery, the goods should be carefully inspected for visible defects (under optimal lighting conditions). If the goods display visible defects prior to installation, the distributor must be notified. If it is decided to install the goods despite visible defects, the warranty will lapse. The damage must be clear, a minimum of 1 cm² is the benchmark. Rigid Floors BV can never be held responsible for indirect damage.

Installation must cease immediately once a visible defect is identified. Claims relating to visible defects after installation will not be accepted. The installer is responsible for inspecting the product before and during installation. Installation of the product constitutes acceptance of its visible condition.

The Rigid Floors BV floor must be stored and installed according to Rigid Floors BV installation instructions (included in the packaging, also available on the website). In case of a claim, proof must be provided that these were followed correctly. The same applies to maintenance instructions. If you have questions about installation or maintenance, contact the dealer or manufacturer.

Flooring materials must be acclimated in the installation area in accordance with the installation instructions prior to installation. The indoor environment must be maintained within suitable temperature and humidity conditions before, during, and after installation. Failure to maintain suitable indoor climatic conditions may result in expansion, contraction, deformation, gapping, lifting, or other damage, which is not covered by this warranty.

Precautions must be taken. Protective material should be provided, such as protective pads under chairs and furniture, soft, wide wheels for wheeled furniture, and door mats at entryways to prevent the tracking in of sand and dust. Be careful with the choice of door mat, as mats containing latex and/or rubber can discolor or stain the floor.

3. Exceptions

In general, Rigid Floors BV can only be held responsible for manufacturing errors. Therefore, errors arising from the following causes (not exhaustive) are excluded:

- Normal wear and tear and/or aging (including changes in gloss)
- Moisture and/or water damage (floor must not be installed outdoors, do not use excessive water during cleaning or expose the floor to water for extended periods)
- Improper use and/or negligence (e.g., stains, scratches, impact of heavy objects, damage caused by high heels)
- Abrasive and/or corrosive substances (e.g., incorrect cleaning agents, pet urine)
- Prolonged contact with rubber or latex
- Use for a purpose other than intended
- Changing climatic conditions (e.g., extreme temperature fluctuations, humidity differences)
- Damage incurred during transport and storage
- Installation on electric underfloor heating (surface temperature must never exceed 27°C) or reversible underfloor heating (surface temperature must never drop below 18°C).
- Make sure to order all flooring components for one and the same project at the same time, as compatibility of planks and tiles from different orders cannot be guaranteed.
- Damage or fading cause by exposure to excessive sunlight or excessive heat.

4. Procedure/Liability

If you have a defect that you believe falls under the warranty, you must report it to your dealer within 15 days of noticing the defect. After this period, the complaint can no longer be considered valid. A copy of your purchase invoice must always be provided with the complaint.

Rigid Floors BV reserves the right, and must be given the opportunity by the complainant, to investigate the complaint on-site, to check the floor in its installed condition where possible. All materials that are part of the complaint must be retained and made available to Rigid Floors BV when requested.

The warranty applies only to the supplied floor; Rigid Floors BV cannot be held responsible for other direct or indirect costs/consequential damages (including, but not limited to, labor and installation costs).

In case of disagreement between the customer and the supplier, an independent expert may be appointed, if necessary, to provide a binding opinion. The cost and compensation for this will be agreed upon in advance.

If the warranty is invoked, i.e., when the complaint is found to be valid, Rigid Floors BV will replace or compensate for the defective floor parts. If the original product is no longer available, Rigid Floors BV guarantees an alternative of the same quality. There is no other form of compensation.

The warranty period is neither extended nor modified in the event of a valid warranty claim, even for the replaced or repaired part of the floor.

The above warranty terms are governed by Belgian law. Other rights may apply, as these may vary from country to country. Disputes fall under the jurisdiction of the court of the district where Rigid floors BV's registered office is located.

by lalegno 

WOOD
—**REDEFINED**